



The Safety Company

July 2012

MSAs **Workman® Self-Retracting Lanyard**,
is now available in 50' length to provide years of dependable service.

MSAs **Workman SRL** provides the best value for your dollar with these and other features:

RFID-enabled product for simplified product tracking and inspection.

400-lb working capacity for increased versatility.

Available with galvanized or stainless steel lifeline to fit your varied applications.

Part numbers are as follows:

Workman SRL, 30-ft, galvanized cable, 36CS snaphook
10119507 | USD List Price \$499.00

Workman SRL, 30-ft, stainless steel cable, 36CS snaphook
10120724 | USD List Price \$530.00

Workman SRL, 50-ft, galvanized cable, 36CS, snaphook
10121834 | USD List Price \$649.00

Workman SRL, 50-ft, stainless steel cable, 36CS snaphook
10121778 | USD List Price \$699.00

Launch kit contents include:

Product bulletin

One-page product sell sheet

Press Release

Updated Workman Series bulletin

**Workman SRLs are in stock and are ready to ship
in both 30- and 50-ft lengths!**

For more information, please visit www.MSAafety.com/WorkmanSRL
to view Workman SRL MSA-TV episodes,
as well as digital versions of launch kit contents.

Best Regards,

Marc Harkins

Fall Protection Product Group Manager



800-321-3396



Workman® 50' Self-Retracting Lanyard

| | |
|--|--|
| Model/Modelo/Modèle | 10121834 |
| Line Length/Largo de la línea/ Ligne de longueur | 50 FT |
| Line Material/Linea de Material/ Materiu de la ligne | Galvanized Cable |
| Serial Number/Número de serie/ Número de série | 1234567890 |
| Date Made/Fecha de fabricación/ Date de fabrication | 2011-5-30 |
| Meets Standards / Cumple las normas/ Satisfait aux normes | CSA Z259.2-2-Type 2 ANSI Z359.14 2012 OSHA |



112 Rev.0 10119836

MSA Workman® Self-Retracting Lanyard

With lightweight design, durable thermoplastic housing and impact-absorbing bumpers, the Workman SRL is not only accepted by users, but also provides years of dependable service. The Workman SRL features:

- RFID-enabled product for simplified product tracking and inspection.
 - 400-lb working capacity for increased versatility.
- Integral, ergonomic carrying handle for easier transport and installation.
- Available with galvanized or stainless steel lifeline to fit your varied applications.
- Swivel snaphook with load indicator at lifeline end greatly limits twisting of cable; also alerts users that the Workman SRL has been involved in a fall.
- Available in 30- and 50-ft lengths to provide the mobility you need.
 - Certification to A10.32, ANSI Z359.14 2012 and CSA Z259.2.2 for compliance and peace of mind. Meets all OSHA requirements.



MSA Workman® Self-Retracting Lanyard Features and Benefits

Integral, ergonomic carrying handle for easier transport and installation.

Impact-absorbing bumpers provides years of dependable service.

RFID-enabled product for simplified product tracking and inspection.

Recessed labels provide increased durability and service life.

Swivel snaphook with load indicator at lifeline end greatly limits twisting of cable; also alerts users that the Workman SRL has been involved in a fall.





MSA Workman[®]

Self-Retracting Lanyard

Product Specification

Materials

- Housing:** Impact-resistant thermoplastic
- Bumpers:** Impact-absorbing thermoplastic rubber
- Frame:** Alloy steel
- Hub:** Cast aluminum
- Locking Mechanism:** Alloy steel
- Lifeline:** 3/16" (5mm) diameter, galvanized steel or stainless steel cable
- Snaphook:** Steel with 3,600-lb gate strength


Technical

- Maximum Working Load:** 400 lbs (181kg)
- Minimum Breaking Strength:** 3000 lbs (13.3kN)
- Lifeline Tension:** Starts at 1.5 lbs (6.7N)
- Maximum Arresting Distance:** 54" (1.4m) for workers 311 - 400 lbs (142kg - 181kg)
- Average Arresting Force:** 900 lbs (4kN) for workers 75 - 310 lbs (34-141kg) and under
1800 lbs (8 kN) for workers 311 - 400 lbs (142kg - 181kg)
- Weight:** 12 lbs - 30-ft version; 17 lbs - 50-ft version
- Line Length:** 30 ft (9m); 50 ft (15m)

Certification

- This product meets or exceeds the following standards:** OSHA: 1926.502, 1910.66
ANSI: A10.32, Z359.14-2012
CSA: Z259.2.2



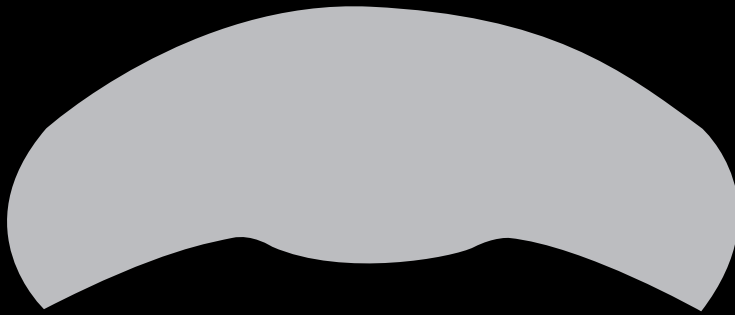

For more information on MSA products,
check out these two great resources:



MSA-U® Training Center is a feature-rich online curriculum offering programs on MSA products, product technologies and safety industry standards. www.MSAafety.com/msau



MSA TV offers a wide variety of informative videos on our products. So log in, lean back and learn!



Scan this QR code for more information.

MSAafety.com/WorkmanSRL

MSA Corporate Center

1000 Cranberry Woods Drive
Cranberry Township, PA 16066 USA
Phone 724-776-8600

www.MSAafety.com

U.S. Customer Service Center

Phone 1-800-MSA-2222
Fax 1-800-967-0398

MSA Canada

Phone 1-800-MSA-2222
Fax 1-800-967-0398

MSA Mexico

Phone 01-800-672-7222
Fax 52-44-2227-3943

MSA International

Phone 724-776-8626
Toll Free 1-800-672-7777
FAX 724-741-1559

Note: This bulletin contains only a general description of the products shown. While uses and performance capabilities are described, under no circumstances shall the products be used by untrained or unqualified individuals and not until the product instructions including any warnings or cautions provided have been thoroughly read and understood. Only they contain the complete and detailed information concerning proper use and care of these products.



ID 2301-107-MC / July 2012

© MSA 2012 Printed in U.S.A.

MSA
The Safety Company