

## CONVEYOR BELT SPECIFICATIONS

Return completed form to Bret Shetler, NASCO-OP

MEMBER: \_\_\_\_\_ CONTACT : \_\_\_\_\_

PHONE: \_\_\_\_\_ DATE: \_\_\_\_\_

### MATERIAL

Description of Material : \_\_\_\_\_

Average item weight: \_\_\_\_\_ lbs Oily or wet : \_\_\_\_\_


### BELT

Width: \_\_\_\_\_ inches Length: \_\_\_\_\_ inches PIW : \_\_\_\_\_

Plies : \_\_\_\_\_ Top Cover thickness : \_\_\_\_\_ inches Bottom Cover thickness \_\_\_\_\_ inches

### CLEATS

Is this a cleated belt? : \_\_\_\_\_ Cleat style (Straight, Chevron, Herringbone, Other) : \_\_\_\_\_

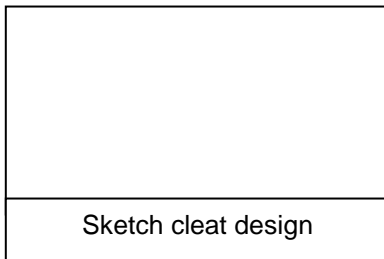

Cleat height : \_\_\_\_\_ inches Centers: \_\_\_\_\_


Other : \_\_\_\_\_

### LACING

Lacing installed (Y/N) : \_\_\_\_\_ Style : \_\_\_\_\_

### CONVEYOR

Type (Flat or Slider Bed, Troughed) : \_\_\_\_\_

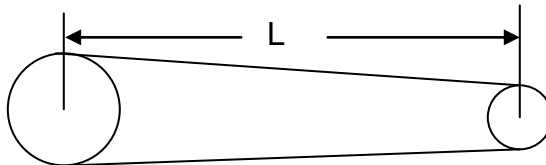

Head pulley dia: \_\_\_\_\_ inches, Length (L) : \_\_\_\_\_ inches, Tail pulley dia: : \_\_\_\_\_ inches

Incline : \_\_\_\_\_ degrees